

Great for Low Overhead Space

CIP's C Series Vertical Material Lift is perfect for a variety of load sizes and weights. The one-sided lifting mechanism of the cantilever has the capability of traveling up to 100' while offering strength and stability to effortlessly moving your items to upper and lower levels.

Most commonly used in warehouses where low overhead space is a concern, (overhead clearance is as low as 7' from the upper floor). The top mounted drive system allows for a smaller footprint as compared to other lifts. The platform carriage design is one of our most versatile by allowing up to three types of loading/unloading configurations: "C", "Z", or "90".

Standard Features

- Load Capacity: up to 5,000 lbs
- Platform Size: up to 10'W x 8'D
- Operating Levels: up to 4-Stops
- Travel Height: up to 100'
- Operating Speed: 20-25 fpm
- Power: 230V 3P
- Illuminated Controls at Each Level
- All-Mechanical, Chain Lifting System
- Broken Chain Safety Brakes
- Slack Chain Switches
- Double Swing Gates at Each Level
- Mount: Surface or Pit

Options

- Operating Speed Increased
- Power Increased To: 460V 3P
- Soft/Start-Soft Stop Operation
- Ground Level Loading Ramp
- Security Enclosures
- Multi-Level Operation
- Outside Applications
- Split Guide Rails & Knock-Down Platform Carriage

C Series Vertical Material Lift

Vertical Reciprocating Conveyor



shown with optional security enclosures



Toll Free: 800-699-2212

Phone: 321-728-3355 Fax: 321-728-3352

E-Mail: sales@customindprod.com

www.customindprod.com

7862 Ellis Road, Melbourne, FL 32904, USA

▶ C Series (C)


Technical Specifications

Please fill out your specifications in the spaces provided. Afterwards, contact us for additional information and for special requirements or configurations.

1. What **WEIGHT CAPACITY** do you require?
(1,000 - 5,000 lbs.) _____
2. What is the **HEIGHT** in inches from the ground level floor surface to the second level floor surface? (up to 100') _____
3. What **PLATFORM CARRIAGE SIZE** do you require?
(up to 10'W x 8'D) _____
4. What **PLATFORM LOAD HEIGHT** do you require?
(Open load height only restricted by height of ceiling on upper level)
5. Which **LOAD CONFIGURATION** do you require?
(C, Z, or 90°) _____
6. Will the unit be **PIT** or **SURFACE** mounted? _____
7. If you choose a surface mounted unit, do you require an optional **LOADING RAMP**? _____


Surface Mount: The loading height is 6" or 8" from the floor on the ground level and flush with the floor on upper levels.

Pit Mount:
Loading height is flush with the floor on all levels.

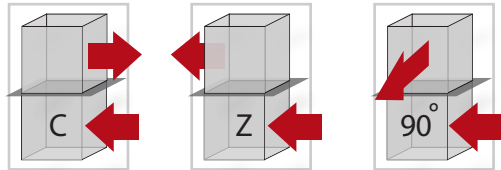


Load / Unload Configurations

General Dimensions

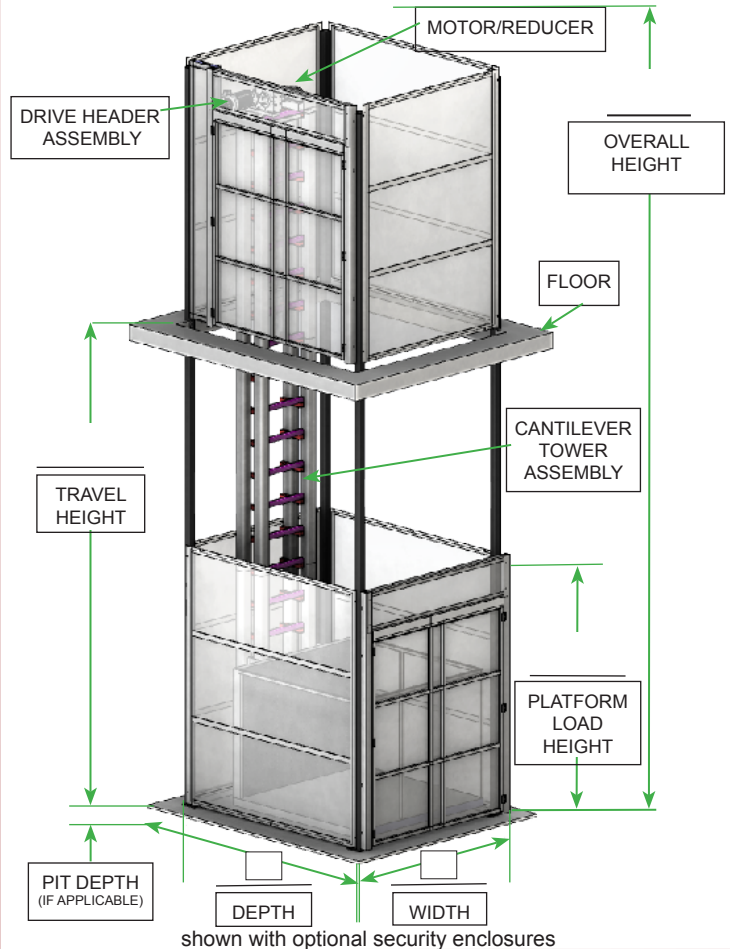

Optional Security Enclosures

Shown On A Two-Stop, C Configuration Unit

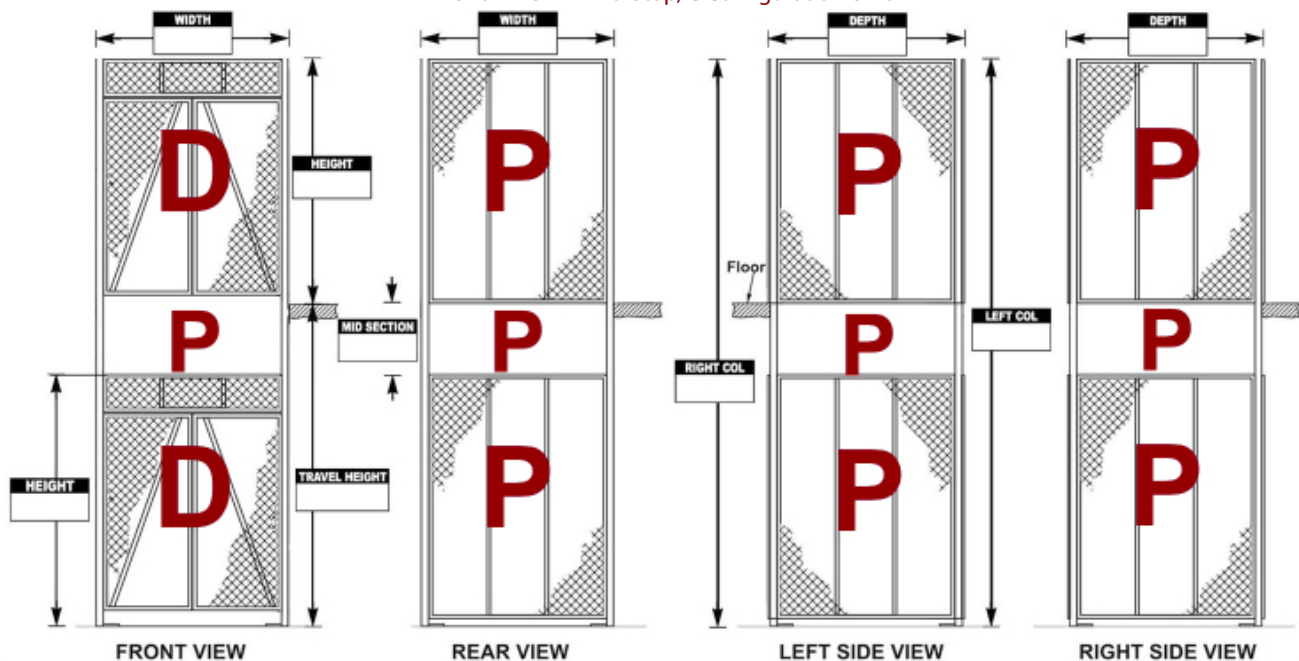

Products manufactured by Custom Industrial Products, Inc. (CIP) are for material use only (no riders) and are to be installed in accordance with ASME B20.1. It is the responsibility of the owner to install and operate the equipment in accordance to ASME B20.1 and all applicable federal, state, and local codes.